

Azteka W - Absorber

Absorption
PRO AUDIO

Specifications

Acoustic performance:

Absorption range | 315 Hz to 3150 Hz

Acoustic class | C

Absorption coef. (α_w) | 0,7(M)

FG

Dim. | 595x595x58mm

Weight | 1,55 Kg*

Units per box | 8

BoxWeight | 15,45 Kg*

FR+

Dim. | 595x595x60mm

Weight | Kg*

Units per box | 6

BoxWeight | Kg*

Installation - Mechanical or Chemical

Packing Dimensions - 640x385x640mm

* Approximate weight

Product finishes:



Blanc



Cerise



Marron



Noir



Rouge




Wenge

Description

Azteka acoustic panels were designed to reduce standing waves and preventing them from filtering, drastically improving speech clarity. Azteka's performance begins at 315 Hz and offers effective and even absorption up to 3150 Hz. Azteka is an impressive combination of unique Artnovion acoustic design with high performance acoustical cores. Azteka panels can be effortlessly installed on walls or ceilings. Available in standard market furniture grade fire rate, appropriate for home use applications, compliant with all domestic level fire grades; and Fire Rate + fire resistance, compliant with entry-level fire resistance, certified under specific European and American regulations.

Technical Information

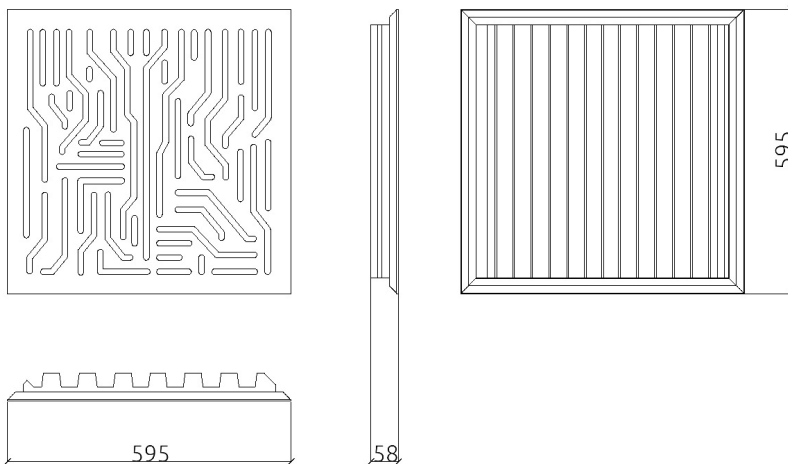

Performance



hello@artnovion.com
www.artnovion.com