

## Andes - Absorber

Absorption  
PRO AUDIO

### Specifications

#### Acoustic performance:

Absorption range | 160Hz to 5000Hz

Acoustic class | A

Absorption coef. ( $\alpha_w$ ) | 1,0(M)

#### FG

Dim. | 595x595x90mm

Weight | 1,05 Kg\*

Units per box | 6

BoxWeight | 8,50 Kg\*

#### FR+

Dim. | 595x595x90mm

Weight | 1,05 Kg\*

Units per box | 6

BoxWeight | 8,50 Kg\*

**Installation** - Mechanical or Chemical

**Packing Dimensions** - 640x385x640mm

\* Approximate weight

### Product finishes:



Bianco

Bordo

Gentian

Grigio



Nebbia

Nero


Noce

### Description

Andes Absorber was designed to control noise, sound reflections and excessive reverberation, in a decorative manner. Manufactured with premium materials and carefully wrapped with acoustic fabric, this product has an outstanding performance from mid to high frequencies.

Using a patented technique, the rear crenellated surface of the panel was designed to optimise performance by increasing surface area, reduce raw material waste and improve shipping, reducing packaging size and increasing the products resistance. Available in standard market furniture grade fire rate, appropriate for home use applications, compliant with all domestic level fire grades; and Fire Rate + fire resistance, compliant with entry-level fire resistance, certified under specific European and American regulations. Available in 7 standard colours, plus customised colours on demand.

### Technical Information

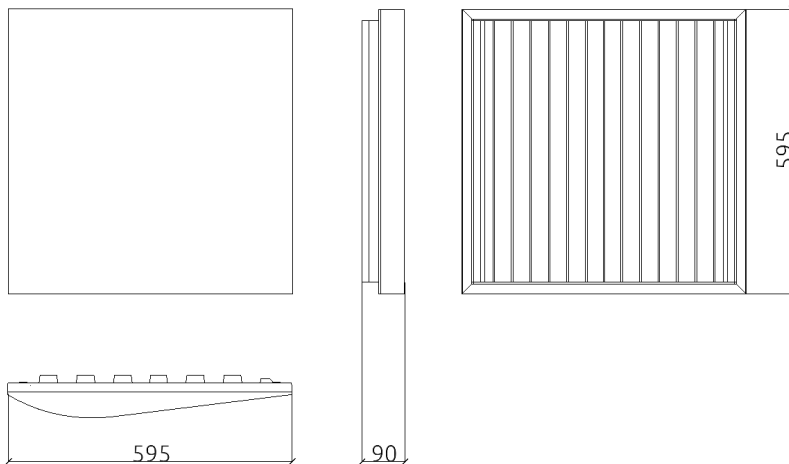

### Performance



hello@artnovion.com  
www.artnovion.com