

## Verona W AE

Paneling  
ARCHITECTURE & ENGINEERING

### Specifications

**Acoustic performance:**

Absorption range | 400Hz to 3150Hz

Acoustic class | C

Absorption coef. ( $\alpha_w$ ) | 0,75

**FR++**

Dim. | 595x595x40 mm

Weight | Kg\*

Units per box | 8

Box Weight | Kg\*

**Installation** - Mechanical or Chemical

**Packing Dimensions** - 640x385x640 mm

\* Approximate weight


### Product finishes:

### Description


VERONA sound absorber panels can play a very important role in creating an ideal and productive atmosphere in a workplace, restaurant or even in a stadium or auditorium.

When properly installed, sound absorber panels like VERONA deflect external noises and regulate the sound inside a room. With an absorption treatment range between 400 Hz and 3150 Hz, VERONA Absorber can be easily applied to ceilings with a plastic finish, and to walls with an exclusive wood finish.

### Technical Information

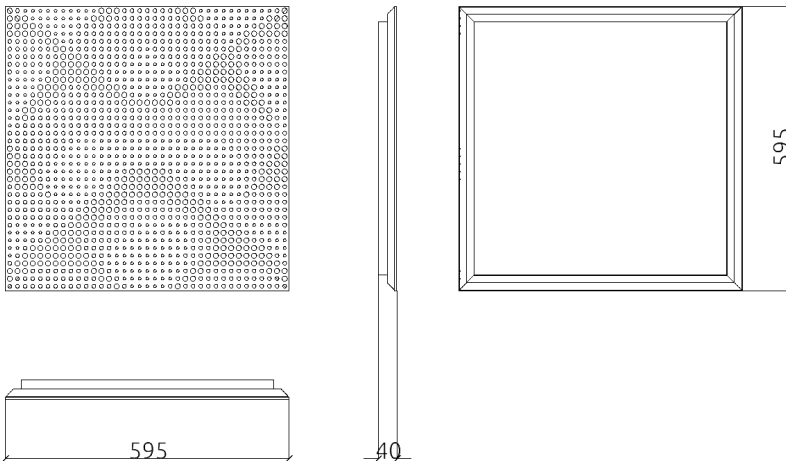

### Performance

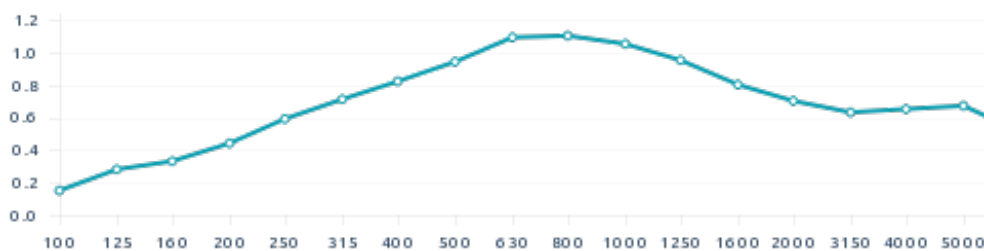

hello@artnovion.com  
www.artnovion.com